

An analysis of electromagnetic scattering from finite-width strips

Zahra Masouri ^{* †}, Saeed Hatamzadeh-Varmazyar [‡]

Abstract

This article deals with the use of an appropriate model in determining the induced current distribution on finite-width strip electromagnetic scatterer. For this purpose, electric field integral equation (EFIE) as a mathematical model is surveyed and used for modeling of the problem. An appropriate numerical method is then proposed to obtain the approximate numerical results for the EFIE. The results are given in both TM and TE polarizations.

Keywords : Current density; EFIE; Mathematical modeling; Approximate solution; Finite-width strip scatterer.

1 Introduction

Valuable efforts have been spent, by researchers, on introducing novel ideas for the solution of various functional equations (for example, see [3, 4, 10, 16, 17]). Integral equation technique is a well-known approach for modeling of scattering problems. Traditionally, most of the numerical methods for the solution of these models use basis functions including, for example, characteristic basis functions [18], Rao, Wilton, and Glisson (see references of [13]), radial basis functions [11], Fourier series [12], wavelets [8, 9], etc. Some methods solve the integral equation model using entire domain basis functions [14] and some of them use the singular integral equation approach [19, 15]. Some researchers have proposed modified or hybrid methods to increase the computational efficiency of the traditional approaches. A regularized combined field integral equation (CFIE) pertinent to the analysis of scat-

tering from 2-D perfect electrically conducting objects is presented in [2], in which the regularization is achieved via analytical inversion of the hypersingular part of the CFIE. An alternate form of the CFIE is introduced in [1] which is free of many of the deficiencies of traditional formulations for smooth, convex geometries. A mixed-domain Galerkin expansion is shown in [7] to lead to a computationally efficient formulation for classes of scattering problems involving electrically large two-dimensional scatterers with localized discontinuities.

This article focuses on using the integral equation model to survey the problem of electromagnetic scattering from finite-width strips. Firstly, the EFIE is surveyed as a mathematical model for electromagnetic scattering from arbitrary bodies and then it is simplified to be matched with the main problem. Since the obtained model has no analytical solution, hence an approximation method is presented for solution of the problem. For determining the scattered field we must know the current density on the strip, therefore the plots of surface current are given for different conditions.

*Corresponding author. nmasouri@yahoo.com

[†]Department of Mathematics, Khorramabad Branch, Islamic Azad University, Khorramabad, Iran.

[‡]Department of Electrical Engineering, Islamshahr Branch, Islamic Azad University, Tehran, Iran.

2 EFIE model

The EFIE is based on the boundary condition that the total tangential electric field on a perfectly electric conducting (PEC) surface of scatterer is zero [5]. This can be expressed as

$$\begin{aligned} \mathbf{E}_t^t(\mathbf{r} = \mathbf{r}_s) &= \mathbf{E}_t^i(\mathbf{r} = \mathbf{r}_s) + \mathbf{E}_t^s(\mathbf{r} = \mathbf{r}_s) \\ &= 0, \quad \text{on } S, \end{aligned} \quad (2.1)$$

or

$$\mathbf{E}_t^s(\mathbf{r} = \mathbf{r}_s) = -\mathbf{E}_t^i(\mathbf{r} = \mathbf{r}_s), \quad \text{on } S, \quad (2.2)$$

where S is the conducting surface of the scatterer, $\mathbf{r} = \mathbf{r}_s$ is the position vector of any point on the surface of the scatterer, and \mathbf{E}^i , \mathbf{E}^s , and \mathbf{E}^t are respectively the incident, scattered, and total electric fields. Also, subscript t indicates tangential components.

The incident field that impinges on the surface of the scatterer induces on it an electric current density \mathbf{J}_s which in turn radiates the scattered field. The scattered field everywhere can be found using the following equation [5]:

$$\begin{aligned} \mathbf{E}^s(\mathbf{r}) &= -j\omega\mathbf{A} - j\frac{1}{\omega\mu\epsilon}\nabla(\nabla\cdot\mathbf{A}) \\ &= -j\frac{1}{\omega\mu\epsilon}[\omega^2\mu\epsilon\mathbf{A} + \nabla(\nabla\cdot\mathbf{A})], \end{aligned} \quad (2.3)$$

where ϵ is the permittivity of the medium, μ is the permeability of the medium, ω is the angle frequency of the incident field, ∇ is the gradient operator, j is imaginary unit, and \mathbf{A} is the magnetic vector potential defined as

$$\mathbf{A}(\mathbf{r}) = \mu \iint_S \mathbf{J}_s(\mathbf{r}') \frac{e^{-j\beta R}}{4\pi R} ds', \quad (2.4)$$

where R is the distance from source point to the observation point.

Equations (2.3) and (2.4) can also be expressed as [5]

$$\begin{aligned} \mathbf{E}^s(\mathbf{r}) &= -j\frac{\eta}{\beta} \left[\beta^2 \iint_S \mathbf{J}_s(\mathbf{r}') G(\mathbf{r}, \mathbf{r}') ds' \right. \\ &\quad \left. + \nabla \iint_S \nabla' \cdot \mathbf{J}_s(\mathbf{r}') G(\mathbf{r}, \mathbf{r}') ds' \right], \end{aligned} \quad (2.5)$$

where η is the intrinsic impedance of the medium, β is the phase constant, \mathbf{r} and \mathbf{r}' are position vectors of the observation point and source point respectively, and

$$G(\mathbf{r}, \mathbf{r}') = \frac{e^{-j\beta R}}{4\pi R}, \quad (2.6)$$

and

$$R = |\mathbf{r} - \mathbf{r}'|. \quad (2.7)$$

In Eq. (2.5), ∇ and ∇' are respectively the gradients with respect to the observation and source coordinates, and $G(\mathbf{r}, \mathbf{r}')$ is referred to as Green's function for a three-dimensional scatterer.

If the observations are restricted on the surface of the scatterer ($\mathbf{r} = \mathbf{r}_s$), then Eq. (2.5) through Eqs. (2.6) and (2.7) can be expressed using Eq. (2.2) as

$$j\frac{\eta}{\beta} [\beta^2 \iint_S \mathbf{J}_s(\mathbf{r}') G(\mathbf{r}_s, \mathbf{r}') ds' +$$

$$\nabla \int \int_S \nabla' \cdot \mathbf{J}_s(\mathbf{r}') G(\mathbf{r}_s, \mathbf{r}') ds'] = \mathbf{E}_t^i(\mathbf{r} = \mathbf{r}_s). \quad (2.8)$$

Because the right side of Eq. (2.8) is expressed in terms of the known incident electric field, it is referred to as the electric field integral equation. It can be used to find the current density $\mathbf{J}_s(\mathbf{r}')$ at any point $\mathbf{r} = \mathbf{r}'$ on the scatterer. It should be noted that Eq. (2.8) is actually an integro-differential equation, but usually it is referred to as an integral equation.

Equation (2.8) is a general surface EFIE for three-dimensional problems and its form can be simplified for two-dimensional geometries. Considering cylindrical coordinates system, it is assumed that the scatterer is very long in the $\pm z$ direction and is parallel to the z -axis. After several steps of mathematical operations, the two-dimensional EFIE for the case of TM polarization can be concluded form (2.8) as [5]

$$\frac{\beta\eta}{4} \int_C I_z(\rho') H_0^{(2)}(\beta|\rho_m - \rho'|) dC' = E_z^i(\rho_m), \quad (2.9)$$

where $H_0^{(2)}$ is Hankel function of the second kind of zero order, ρ_m is position vector of any observation point on the scatterer, ρ' is position vector of any source point on the scatterer, C is perimeter of the scatterer, I is the surface current distribution on the scatterer, E^i is the incident electric field, β is the phase constant, and η is intrinsic impedance of the medium. For the TE polariza-

tion we have [5]

$$\begin{aligned} & \frac{\eta}{4\beta} \left\{ \beta^2 \int_C I_c(\rho') \left[\hat{c}_m \cdot \hat{c}' H_0^{(2)}(\beta|\rho_m - \rho'|) \right] dc' \right. \\ & \left. + \frac{d}{dc} \left[\nabla \cdot \int_C I_c(\rho') \left[\hat{c}' H_0^{(2)}(\beta|\rho_m - \rho'|) \right] dc' \right] \right\} \\ & = -E_c^i(\rho_m), \end{aligned} \tag{2.10}$$

where \hat{c}_m and \hat{c}' are unit vectors tangent to the scatterer perimeter at the observation and source points, respectively. We see that the EFIE, for both TM and TE polarizations, has the form of Fredholm integral equation of the first kind.

In general, (2.9) and (2.10) do not have analytical solutions. Therefore, we have to obtain approximate solutions for them by using a numerical method.

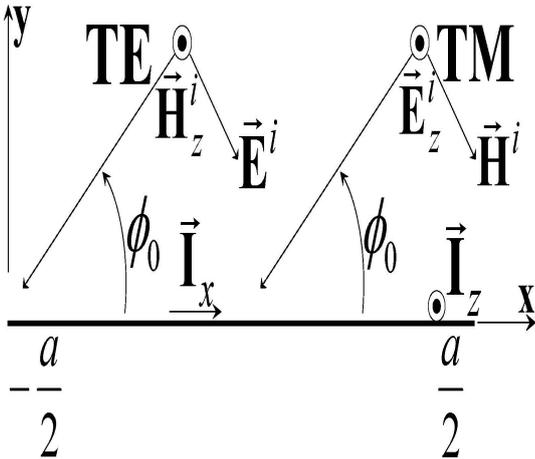


Figure 1: Finite-width strip encountered by an incoming plane wave.

3 Approximate solution of EFIE for finite-width conducting strip

Now, the problem of electromagnetic scattering from a strip is solved. In Figure 1, there is a perfect electrically conducting strip that is very long in the $\pm z$ direction. This strip is encountered by an incoming plane wave. Both TM and TE polarizations are analyzed here. If the incoming plane wave has a polarization with its electric field parallel to the z -axis and the magnetic field of this wave is entirely in the $x - y$ plane (and is therefore transverse to the z -axis), then such a wave is

called transverse magnetic (TM) polarized wave. This polarization therefore produces a current on the strip that flows along the z -axis [6]. If it has a polarization with its magnetic field parallel to the z -axis and the electric field of this wave is entirely in the $x - y$ plane, then it is called transverse electric (TE) polarized wave. This polarization produces a current on the strip that flows along the x -axis.

For determining the current density in TM or TE polarization, we must find an approximate solution for (2.9) or (2.10), respectively. For this purpose, we use an appropriate set of basis functions surveyed in the following subsection.

3.1 Basis functions

Let us consider an m -set of truncated cosines for any positive integer m over real interval $[a, b)$ as

$$T_i(t) = \begin{cases} \cos(\gamma(t - a - ih - \frac{h}{2})), & a + ih \leq t, \\ & t < a + (i + 1)h, \\ 0, & \text{otherwise,} \end{cases} \tag{3.11}$$

where $h = \frac{b-a}{m}$, $i = 0, 1, \dots, m - 1$, and γ has a real value and may be considered as a regularization factor.

The above definition can obviously make a set of disjoint and orthogonal basis functions. For arbitrary i and j , such that $i = 0, 1, \dots, m - 1$ and $j = 0, 1, \dots, m - 1$, we have

$$\begin{aligned} \langle T_i, T_j \rangle &= \int_a^b T_i(t) T_j(t) dt \\ &= \begin{cases} \frac{h}{2} + \frac{1}{2\gamma} \sin(\gamma h), & i = j, \\ 0, & i \neq j, \end{cases} \end{aligned} \tag{3.12}$$

in which $\langle \cdot, \cdot \rangle$ indicates the inner product.

Moreover, it is clear that function T_i may be considered as follows:

$$T_i(t) = \varphi_i(t) \cos(\gamma(t - a - ih - \frac{h}{2})), \tag{3.13}$$

where φ_i is i th block-pulse function (BPF) defined as

$$\varphi_i(t) = \begin{cases} 1, & a + ih \leq t < a + (i + 1)h, \\ 0, & \text{otherwise.} \end{cases} \tag{3.14}$$

The disjointness and orthogonality properties of T_i 's can make them very efficient for approximation of functions. The expansion of a function

f over $[a, b)$ with respect to $T_i, i = 0, 1, \dots, m-1$, may be compactly written as

$$f(t) \simeq \sum_{i=0}^{m-1} f_i T_i(t), \quad (3.15)$$

where f_i 's, the expansion coefficients, may be computed by

$$\begin{aligned} f_i &= \langle f, T_i \rangle \\ &= \int_a^b f(t) T_i(t) dt. \end{aligned} \quad (3.16)$$

In the next subsection, we will formulate a numerical method based on these functions for solving the EFIE for the strip problem.

3.2 Formulation of numerical method

Let us consider first kind Fredholm integral equation of the form

$$\int_a^b k(s, t) x(t) dt = f(s), \quad a \leq s < b, \quad (3.17)$$

where the functions k and f are known but x is the unknown function to be determined. Also, $k \in L^2([a, b) \times [a, b))$ and $f \in L^2([a, b))$.

Approximating the unknown function x with respect to the truncated cosines using (3.15) gives

$$x(t) \simeq \sum_{i=0}^{m-1} x_i T_i(t), \quad (3.18)$$

where x_i 's are defined as in (3.16). Substituting (3.18) into (3.17) results in

$$\int_a^b k(s, t) \left(\sum_{i=0}^{m-1} x_i T_i(t) \right) dt = f(s), \quad (3.19)$$

or

$$\sum_{i=0}^{m-1} x_i \int_a^b k(s, t) T_i(t) dt = f(s). \quad (3.20)$$

Now, choosing m appropriate points $s_j, j = 0, 1, \dots, m-1$, we obtain

$$\sum_{i=0}^{m-1} x_i \int_a^b k(s_j, t) T_i(t) dt = f(s_j), \quad j = 0, 1, \dots, m-1. \quad (3.21)$$

(3.21) is a linear system of m algebraic equations in terms of m unknown coefficients x_i . Solution of this systems gives x_i 's, and then we obtain an approximate solution $x(s) \simeq \sum_{i=0}^{m-1} x_i T_i(s)$ for (3.17).

3.3 Numerical results

The results of applying the proposed numerical method in solving the EFIE for the finite-width strip are given here. The medium is assumed to be free space. Figure 2 shows the current distribution across the strip obtained by the method for $\beta = 2\pi, \phi_0 = \frac{\pi}{2}, a = \frac{3\lambda}{2}$, and $\gamma = 1$, in TM polarization. Also, Figure 3 gives the results in TE polarization. For $a = 6\lambda$, the results in TM and TE polarizations are respectively given in Figures 4 and 5.

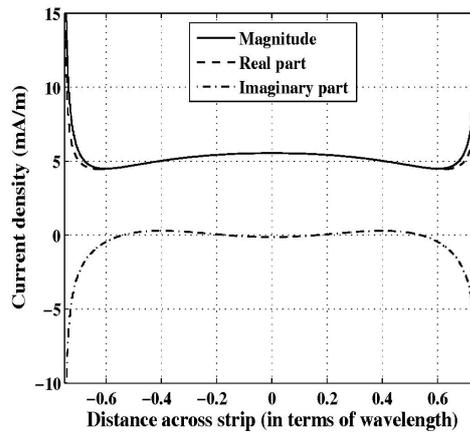


Figure 2: Current distribution across the strip for $\beta = 2\pi, \phi_0 = \frac{\pi}{2}, a = \frac{3\lambda}{2}$, and $\gamma = 1$, in TM polarization.

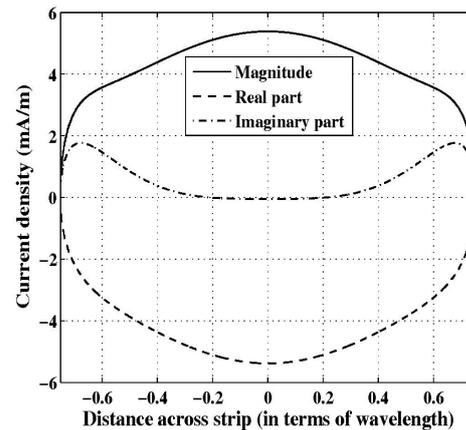


Figure 3: The results in TE polarization.

4 Conclusion

We surveyed, in this article, an appropriate mathematical model for calculating the current density on a finite-width strip scatterer. We saw that the

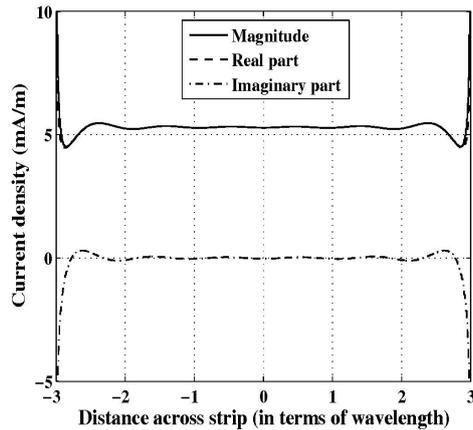


Figure 4: Current distribution across the strip for $\beta = 2\pi$, $\phi_0 = \frac{\pi}{2}$, $a = 6\lambda$, and $\gamma = 1$, in TM polarization.

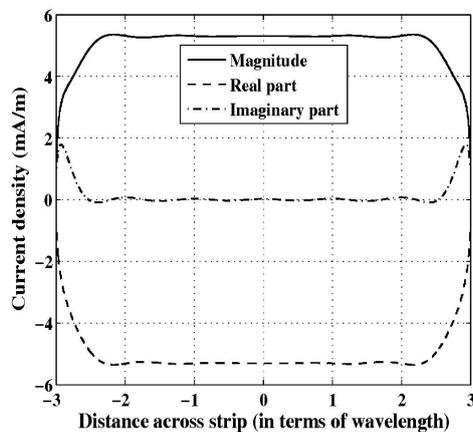


Figure 5: The results in TE polarization.

analysis of the problem in TM and TE polarizations needs different models. Two integral equations were mentioned for modeling of the problem in both polarizations. A numerical method was proposed for the solution of the two integral equations because they have no analytical solution. Finally the results were given for both polarizations.

References

- [1] R. J. Adams, *Combined field integral equation formulations for electromagnetic scattering from convex geometries*, IEEE Transactions on Antennas & Propagation 52 (2004) 1294-1303.
- [2] F. P. Andriulli, E. Michielssen, *A regularized combined field integral equation for scattering from 2-D perfect electrically conducting objects*, IEEE Transactions on Antennas & Propagation 55 (2007) 2522-2529.
- [3] E. Babolian, N. Dastani, *Numerical solutions of two-dimensional linear and nonlinear Volterra integral equation: Homotopy perturbation method and differential transform method*, International Journal of Industrial Mathematics 3 (2011) 157-167.
- [4] E. Babolian, Z. Masouri, S. Hatamzadeh-Varmazyar, *A direct method for numerically solving integral equations system using orthogonal triangular functions*, International Journal of Industrial Mathematics 1 (2009) 135-145.
- [5] C. A. Balanis, *Advanced Engineering Electromagnetics*, Wiley, New York, 1989.
- [6] R. Bancroft, *Understanding Electromagnetic Scattering Using the Moment Method*, Artech House, London, 1996.
- [7] J. M. Bornholdt, L. N. Medgyesi-Mitschang, *Mixed-domain Galerkin expansions in scattering problems*, IEEE Transactions on Antennas & Propagation 36 (1988) 216-227.
- [8] R. Danesfahani, S. Hatamzadeh-Varmazyar, E. Babolian, Z. Masouri, *Applying Shannon wavelet basis functions to the method of moments for evaluating the radar cross section of the conducting and resistive surfaces*, Progress in Electromagnetics Research B 8 (2008) 257-292.
- [9] R. Danesfahani, S. Hatamzadeh-Varmazyar, E. Babolian, Z. Masouri, *A scheme for RCS determination using wavelet basis*, International Journal of Electronics and Communications (AEÜ) 64 (2010) 757-765.
- [10] S. Hatamzadeh-Varmazyar, M. Naser-Moghadasi, R. Sadeghzadeh-Sheikhan, *Numerical method for analysis of radiation from thin wire dipole antenna*, International Journal of Industrial Mathematics 3 (2011) 135-142.
- [11] S. L. Ho, S. Yang, H. C. Wong, G. Ni, *A meshless collocation method based on radial basis functions and wavelets*, IEEE Transactions on Magnetics 40 (2004) 1021-1024.

- [12] R. M. James, *On the use of Fourier series/FFT's as global basis functions in the solution of boundary integral equations for EM scattering*, *IEEE Transactions on Antennas & Propagation* 42 (1994) 1309-1316.
- [13] A. McCowen, *The field testing of an integral equation formulation for scattering in the resonance region*, *IEEE Transactions on Magnetics* 42 (2006) 807-810.
- [14] L. N. Medgyesi-Mitschang, J. M. Putnam, *Electromagnetic scattering from electrically large coated flat and curved strips: entire domain Galerkin formulation*, *IEEE Transactions on Antennas & Propagation* AP 35 (1987) 790-801.
- [15] P. Poey, P. L. Guigue, *Determination of the current distribution on a bidimensional infinite periodic structure of thin metallic wires using the method of the singular integral equation*, *IEEE Transactions on Antennas & Propagation* AP 35 (1987) 221-224.
- [16] A. Razani, Z. Goodarzi, *A solution of Volterra-Hamerstain integral equation in partially ordered sets*, *International Journal of Industrial Mathematics* 3 (2011) 277-281.
- [17] Sh. S. Behzadia, A. Yildirim, *A method to estimate the solution of a weakly singular nonlinear integro-differential equations by applying the Homotopy methods*, *International Journal of Industrial Mathematics* 4 (2012) 41-51.
- [18] G. Tiberi, A. Monorchio, G. Manara, R. Mittra, *A spectral domain integral equation method utilizing analytically derived characteristic basis functions for the scattering from large faceted objects*, *IEEE Transactions on Antennas & Propagation* 54 (2006) 2508-2514.
- [19] J. L. Tsalamengas, J. G. Fikioris, *Scattering of E-polarized waves from conducting strips in the presence of a magnetically uniaxial half-space—A Singular integral equation approach*, *IEEE Transactions on Antennas & Propagation* 37 (1989) 1265-1276.



Zahra Masouri received her B.Sc., M.Sc., and Ph.D. degrees in Applied Mathematics, respectively, in 1998, 2000, and 2010, as the first-rank graduate at all the mentioned educational levels. She is currently an Assistant Professor at Khorramabad Branch, Islamic Azad University, Khorramabad, Iran. Her research interest is in numerical analysis; numerical solution of linear and nonlinear integral, integro-differential, and differential equations; numerical linear algebra; and computational Electromagnetics. Dr. Masouri was the research manager and the research vice-chancellor at Khorramabad Branch of Islamic Azad University for some years. She also is the author of many research articles published in scientific journals or presented at various conferences and member of the editorial board of some international journals.



Saeed Hatamzadeh-Varmazyar, Ph.D. in Electrical Engineering, is an Assistant Professor at Islamic Azad University, Tehran, Iran. His research interests include numerical methods in Electromagnetics, numerical methods for solving integral equations, electromagnetic theory, singular integral equations, radar systems, electromagnetic radiation and antenna, and propagation of electromagnetic waves, including scattering, diffraction, and etc. Dr. Hatamzadeh-Varmazyar is the author of many research articles published in scientific journals. More details may be found on his official website available online at <http://www.hatamzadeh.ir> and <http://www.hatamzadeh.org>.